
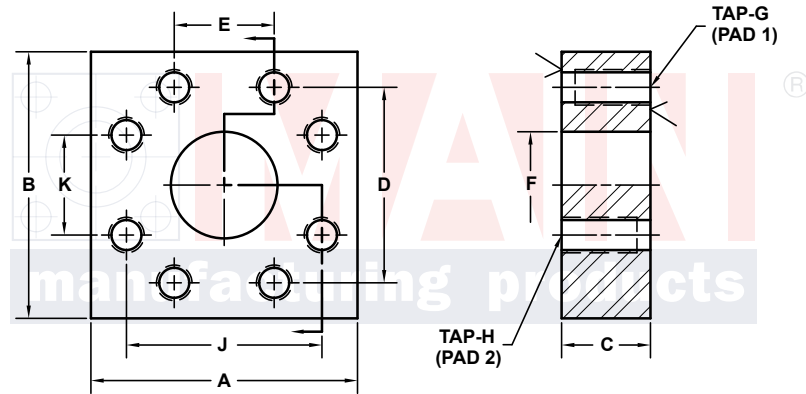


FLANGE ADAPTERS


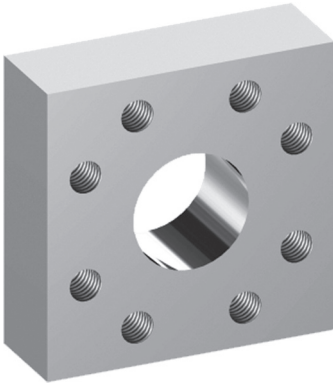


3181 TRI-PARK DR. GRAND BLANC, MI 48439 800-521-7918 810-953-1380 FAX 810-953-1385 INFO@MAINMFG.COM

SAE BOLT PATTERN						62 SERIES TO 61 SERIES ^④							
PAD 1 C62	PAD 2 C61	PART NUMBER	A	B	C	D	E	F	G	H	J	K	
1/2	1/2	6340-08-08B					USE 6316-08-08B						
3/4	3/4	6340-12-12B					USE 6316-12-12B						
3/4	1/2	6340-12-08B	2.25	2.81	1.75	2.000	.937	.50	3/8-16	5/16-18	1.500	.688	
1	1	6340-16-16B					USE 6316-16-16B						
1	3/4	6340-16-12B	2.75	3.19	1.75	2.250	1.093	.75	7/16-14	3/8-16	1.875	.875	
1	1/2	6340-16-08B	2.25	3.19	1.75	2.250	1.093	.50	7/16-14	5/16-18	1.500	.688	
1 1/4	1 1/4	6340-20-20B					USE 6316-20-20B						
1 1/4	1	6340-20-16B	2.75	3.75	1.75	2.625	1.250	1.00	1/2-13	3/8-16	2.062	1.031	
1 1/4	3/4	6340-20-12B	2.75	3.75	1.75	2.625	1.250	.75	1/2-13	3/8-16	1.875	.875	
1 1/4	1/2	6340-20-08B	2.75	3.75	1.75	2.625	1.250	.50	1/2-13	5/16-18	1.500	.688	
1 1/2	1 1/2	6340-24-24B					USE 6316-24-24B						
1 1/2	1 1/4	6340-24-20B	3.25	4.50	2.00	3.125	1.437	1.25	5/8-11	7/16-14	2.312	1.188	
1 1/2	1	6340-24-16B	3.25	4.50	1.75	3.125	1.437	1.00	5/8-11	3/8-16	2.062	1.031	
1 1/2	3/4	6340-24-12B	3.25	4.50	1.75	3.125	1.437	.75	5/8-11	3/8-16	1.875	.875	
1 1/2	1/2	6340-24-08B	3.25	4.50	1.75	3.125	1.437	.50	5/8-11	5/16-18	1.500	.688	

④ **CAUTION:** Flange adapter pressure rating cannot exceed 61 series pad connection.

FLANGE ADAPTERS

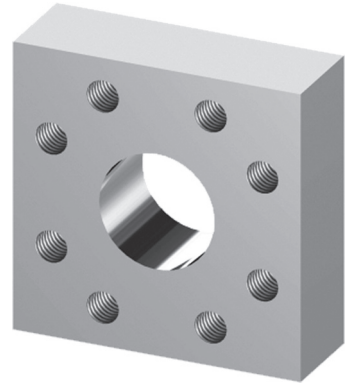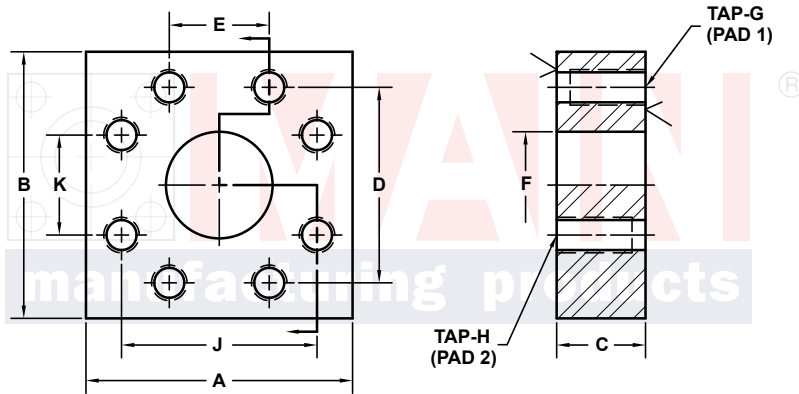

3181 TRI-PARK DR. GRAND BLANC, MI 48439 800-521-7918 810-953-1380 FAX 810-953-1385 INFO@MAINMFG.COM

SAE BOLT PATTERN							62 SERIES TO 61 SERIES ^④						
PAD 1 C62	PAD 2 C61	PART NUMBER	A	B	C	D	E	F	G	H	J	K	
2	2	6340-32-32B					USE 6316-32-32B						
2	1½	6340-32-24B	4.00	5.25	2.00	3.812	1.750	1.50	3/4-10	1/2-13	2.750	1.406	
2	1¼	6340-32-20B	4.00	5.25	2.00	3.812	1.750	1.25	3/4-10	7/16-14	2.312	1.188	
2	1	6340-32-16B	4.00	5.25	1.75	3.812	1.750	1.00	3/4-10	3/8-16	2.062	1.031	
2	¾	6340-32-12B	4.00	5.25	1.75	3.812	1.750	.75	3/4-10	3/8-16	1.875	.875	
2	½	6340-32-08B	4.00	5.25	1.75	3.812	1.750	.50	3/4-10	5/16-18	1.500	.688	
2½^③	2½^①	6340-40-40B					USE 6316-40-40B						
2½^③	2	6340-40-32B	5.00	6.88	2.00	4.875	2.312	1.94	7/8-9	1/2-13	3.062	1.688	
2½^③	1½	6340-40-24B	5.00	6.88	2.00	4.875	2.312	1.50	7/8-9	1/2-13	2.750	1.406	
2½^③	1¼	6340-40-20B	5.00	6.88	2.00	4.875	2.312	1.25	7/8-9	7/16-14	2.312	1.188	
2½^③	1	6340-40-16B	5.00	6.88	2.00	4.875	2.312	1.00	7/8-9	3/8-16	2.062	1.031	
2½^③	¾	6340-40-12B	5.00	6.88	2.00	4.875	2.312	.75	7/8-9	3/8-16	1.875	.875	
2½^③	½	6340-40-08B	5.00	6.88	2.00	4.875	2.312	.50	7/8-9	5/16-18	1.500	.688	
3^③	3^②	6340-48-48B					USE 6316-48-48B						
3^③	2½^①	6340-48-40B	6.00	8.50	2.50	6.000	2.812	2.44	1 1/8-7	1/2-13	3.500	2.000	
3^③	2	6340-48-32B	6.00	8.50	2.50	6.000	2.812	1.94	1 1/8-7	1/2-13	3.062	1.688	
3^③	1½	6340-48-24B	6.00	8.50	2.50	6.000	2.812	1.50	1 1/8-7	1/2-13	2.750	1.406	
3^③	1¼	6340-48-20B	6.00	8.50	2.50	6.000	2.812	1.25	1 1/8-7	7/16-14	2.312	1.188	
3^③	1	6340-48-16B	6.00	8.50	2.50	6.000	2.812	1.00	1 1/8-7	3/8-16	2.062	1.031	

① 2500 PSI Max ② 2000 PSI Max ③ Not included in SAE J518 specifications

④ **CAUTION:** Flange adapter pressure rating cannot exceed 61 series pad connection.