

SOCKET WELD PIPE IN-LINE FLANGES

WITH -4 ORB (7/16-20) GAUGE PORT ⑥



SAE J518 61 SERIES / ISO6162-1 PATTERN

FLANGE SIZE	PIPE SIZE	PART NUMBER	A	B	C	D	E	F	Gmm Jmm	H	K	MOUNTING KIT®			WT
									PART NO.			SCREW SIZE	O-RING		
1/2	1/2	8101-08-08BM8	1.50	2.12	1.25	1.500	.688	.50	8.5	.38	.860	MKM 519	M8 x 45	210	.7
		8102-08-08BM8							M8x1.25			-----	-----	---	
3/4	3/4	8101-12-12BM10	1.75	2.62	1.25	1.875	.875	.75	10.5	.50	1.070	MKM 520	M10 x 45	214	1.2
		8102-12-12BM10							M10x1.5			-----	-----	---	
1	1	8101-16-16BM10	2.00	2.82	1.25	2.062	1.031	1.00	10.5	.50	1.335	MKM 1501	M10 x 45	219	1.5
		8102-16-16BM10							M10x1.5			-----	-----	---	
1 1/4	1 1/4	8101-20-20BM10†	2.50	3.19	1.25	2.312	1.188	1.25	10.5	.50	1.680	MKM 4567	M10 x 45	222	2.0
		8102-20-20BM10†							M10x1.5			-----	-----	---	
1 1/2	1 1/2	8101-24-24BM12‡	2.75	3.75	1.25	2.750	1.406	1.50	13.0	.50	1.920	MKM 3596	M12 x 50	225	2.5
		8102-24-24BM12‡							M12x1.75			-----	-----	---	
2	2	8101-32-32BM12‡	3.25	4.00	1.50	3.062	1.688	1.94	13.0	.62	2.411	MKM 3501	M12 x 55	228	3.6
		8102-32-32BM12‡							M12x1.75			-----	-----	---	
2 1/2 ②	2 1/2	8101-40-40BM12‡	4.00	4.50	1.75	3.500	2.000	2.44	13.0	.75	2.911	MKM 4511	M12 x 60	232	5.7
		8102-40-40BM12‡							M12x1.75			-----	-----	---	
3 ③	3	8101-48-48BM16	4.50	5.31	2.00	4.188	2.438	2.94	17.0	.75	3.540	MKM 508	M16 x 75	237	8.3
		8102-48-48BM16							M16x2			-----	-----	---	
3 1/2 ④	3 1/2	8101-56-56BM16	5.00	6.00	1.50	4.750	2.750	3.44	17.0	.75	4.045	MKM 509	M16 x 65	241	7.7
		8102-56-56BM16							M16x2			-----	-----	---	
4 ④	4	8101-64-64BM16	5.50	6.38	1.50	5.125	3.062	3.94	17.0	.75	4.550	MKM 510	M16 x 60	245	8.3
		8102-64-64BM16							M16x2			-----	-----	---	
5 ④	5	8101-80-80BM16	7.00	7.25	2.00	6.000	3.625	4.94	17.0	.75	5.635	MKM 511	M16 x 75	253	14.5
		8102-80-80BM16							M16x2			-----	-----	---	

MOUNTING KITS listed contain carbon steel bolts and Buna N O-Ring. To specify stainless Grade 18-8 bolts, add an SS at the end of the kit number (MK 501SS).

Please note that using stainless steel bolts may reduce the pressure rating of the assembly.

MATERIAL:
304L Stainless

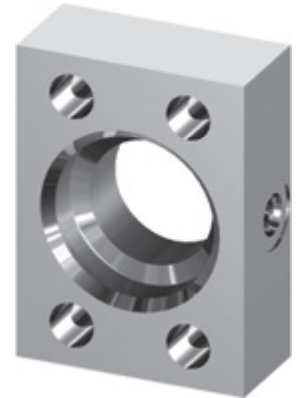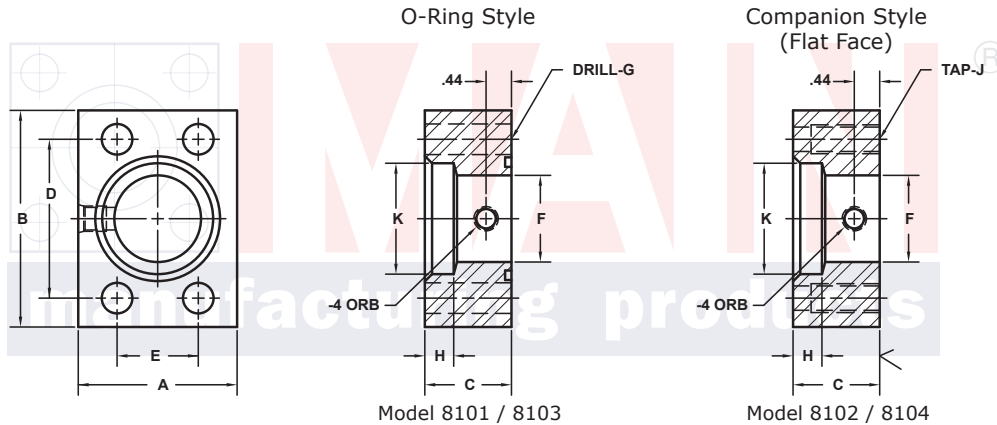

3181 TRI-PARK DR. GRAND BLANC, MI 48439 800-521-7918 810-953-1380 FAX 810-953-1385 INFO@MAINMFG.COM

SAE J518 62 SERIES / ISO6162-2 PATTERN

FLANGE SIZE	PIPE SIZE	PART NUMBER	A	B	C	D	E	F	Gmm Jmm	H	K	MOUNTING KIT®			WT
									PART NO.			SCREW SIZE	O-RING		
1/2	1/2	8103-08-08BM8	1.75	2.22	1.25	1.594	.718	.50	8.5	.50	.860	MKM 519	M8 x 45	210	1.1
		8104-08-08BM8							M8x1.25			-----	-----	---	
3/4	3/4	8103-12-12BM10	2.00	2.81	1.25	2.000	.937	.75	10.5	.50	1.070	MKM 520	M10 x 45	214	1.5
		8104-12-12BM10							M10x1.5			-----	-----	---	
1	1	8103-16-16BM12	2.25	3.19	1.25	2.250	1.093	1.00	12.5	.50	1.335	MKM 1504	M12 x 50	219	1.9
		8104-16-16BM12							M12x1.75			-----	-----	---	
1 1/4	1 1/4	8103-20-20BM12‡	2.75	3.75	1.25	2.625	1.250	1.25	13.0	.50	1.680	MKM 1502	M12 x 50	222	2.7
		8104-20-20BM12‡							M12x1.75			-----	-----	---	
1 1/2	1 1/2	8103-24-24BM16	3.25	4.50	1.50	3.125	1.437	1.50	17.0	.50	1.920	MKM 515	M16 x 60	225	4.7
		8104-24-24BM16							M16x2			-----	-----	---	
2	2	8103-32-32BM20	4.00	5.25	1.75	3.812	1.750	1.94	21.0	.62	2.411	MKM 516	M20 x 70	228	7.8
		8104-32-32BM20							M20x2.5			-----	-----	---	
2 1/2	2 1/2	8103-40-40BM24	5.00	6.88	2.00	4.875	2.312	2.44	25.5	.62	2.911	MKM 517	M24 x 80	232	15.2
		8104-40-40BM24							M24x3			-----	-----	---	
3	3	8103-48-48BM30	6.00	8.50	2.50	6.000	2.812	2.94	32.0	.62	3.540	MKM 518	M30 x 110	237	27.8
		8104-48-48BM30							M30x3.5			-----	-----	---	

① Order Separately ② 2500 PSI Max ③ 2000 PSI Max ④ 500 PSI Max

⑥ Also Available with -6 ORB (9/16-18) GAUGE PORT

NOTE: DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED. + Also Available for M12 Bolts ‡ Also Available for M14 Bolts

© Copyright MAIN Mfg. 2017